

SLIDING GATE RANGE

9000A Automatic Sliding Gate Mk2 Tracked



Automatic | Compliant | Plug & Play



Tracked gates enable the Cantilever to be removed, thus allowing for a much reduced runback distance, where space is a premium.

Also tracked gates can allow for greater drive through openings as the weight of the main gate is supported front and rear.


Tracked gates do require some ongoing maintenance to keep the track area clean and free from Debris.

Gate Speed is also very slightly reduced allowing for a smooth and consistent operation.


Tracked Gate Wheel Spec

1 wheel as the front bottom and
1 wheel at the rear bottom

1230 O O-Groove Normal
Wheel 2 Bearing Yellow
Galvanised 120mmx30mm
480Kg Carrying Capacity (per wheel)

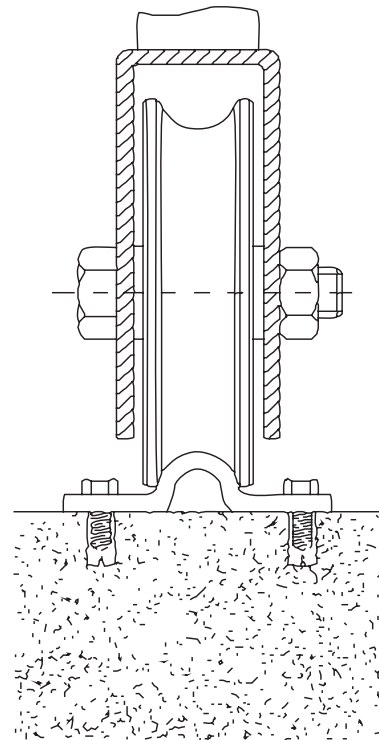

Gate Track Spec

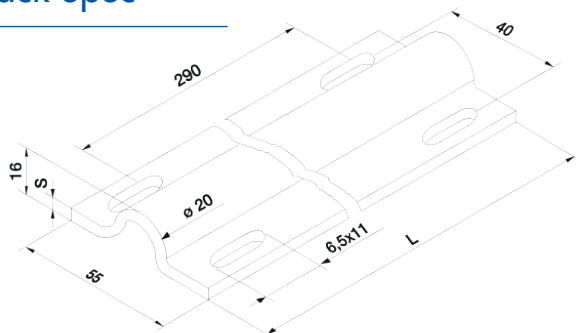

9000A Automatic Sliding Gate Mk2 Tracked

01977 701566

info@gmcfabservices.co.uk

www.gmcfabservices.co.uk

9000A Automatic Sliding Gate Mk2 Tracked

Sliding Gate Range