SLIDING GATE RANGE

9000M Maunual Sliding Gate





The 9000M Cantilever Manual Sliding Gate is a cost effective, low maintenance and simple way of manually controlling access to unauthorised areas.

The internal roller mechanism ensures a smooth and consistent ease of operation providing a durable and efficient service for years to come.

Optional spikes line the top of the gate to deter intruders. The 6mm wall thickness, evenly spaced individual aluminium bars fitted as standard, further add to the sturdy appearance. A heavy duty locking mechanism as standard will give you peace of mind in the knowledge that the lock is as tough and secure as the gate.

The manual gates share the same flexibility as the automatic range offering a vast choice of infills such as palisade, mesh and customised, which can be easily applied to the gate frame if the standard tubular bar is not suitable for the environment.

The gate is delivered as a complete unit and lowered on to pre-installed concrete plinths.

9000M Added Benefits

- Maximum Span: 12 Metres
- Drive Unit: Manual
- Aluminium Powder Coated Finish
- Maximum Height: 2.4M (Max Width 12M)
- Maximum Height: 3.0M (Max Width 10M)
- Infill's: Mesh/Tube/Palisade/Louvre
- Infill's Dimensions: Standard Round Bar 30mm x 6mm Wall Thickness
- Ambient Humidity: -10 ~ 60°C
- Fixings: M16/M20 Anchor Shield Bolts Incl.
- Locinox Industrial Lock with Aluminium Housing & Stainless Steel Mechanism



9000M Manual Sliding Gate







SLIDING GATE RANGE

9000M Maunual Sliding Gate



Product Specifications

Specification CE Approved BS/EN 12453

Maximum Span 12 Metres Drive-Through

Maximum Height 2.4 Metres (Max Width 12M)

Maximum Height 3.0 Metres (Max Width 10M)

Dual Compound Epoxy Finish

Operation Manual

Finish


Colours All RAL Colours Available

250mm x 225mm Extruded Aluminium Beam **Dimensions**

Dimensions Infill - 30mm Dia. x 6mm Wall Thickness



Locinox Industrial Lock with Aluminium Housing & Stainless Steel Mechanism

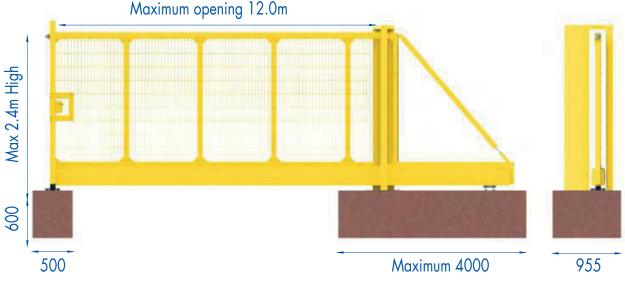

9000M Manual Sliding Gate

