


BARRIER RANGE

6000LS-19 Automatic Barrier



Skirts | Hi-Bars | LEDs | Sensors | Plug & Play

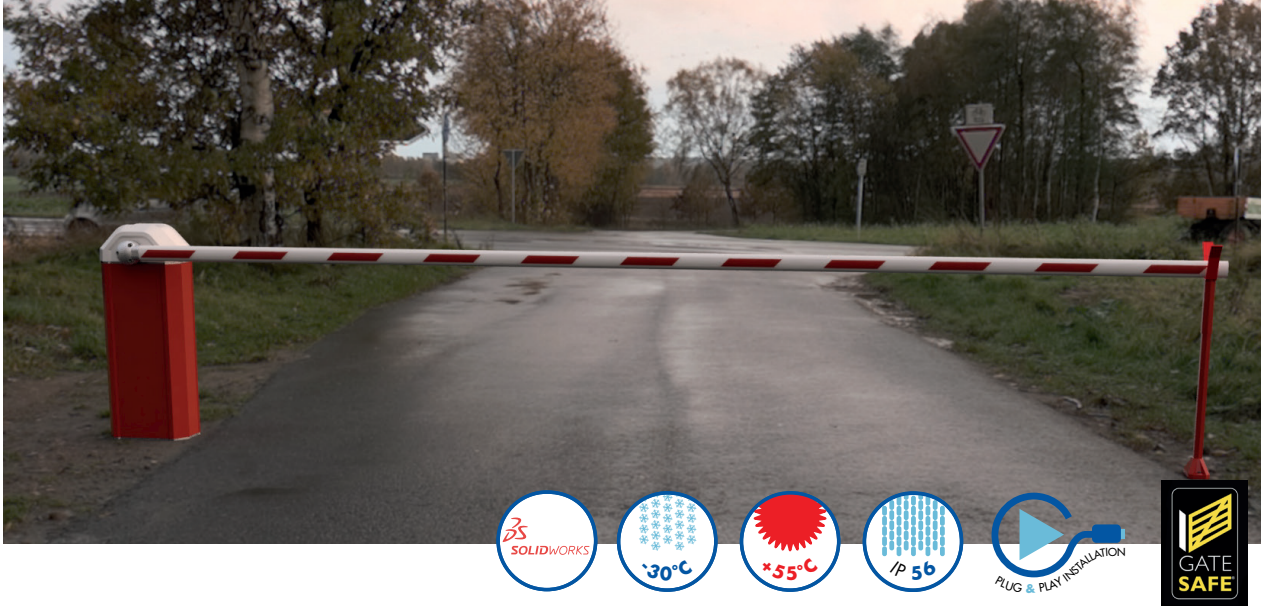

Features

- 100% duty cycle heavy industrial usage
- Designed to be safe yet secure
- Single Phase Supply
- Plug & Play installation
- Programmable control panel c/w fault diagnostic on screen display
- Highest specification of components are ONLY used
- Integrates with other devices to make a secure perimeter
- Aluminium construction for long lasting/maintenance free performance
- Dual safety control for vehicles so making safe and reliable
- A VERY easy to use manual release mechanism which requires no tools in the event of power failure

6000LUX-19 Added Benefits

- Ease of installation
- Low maintenance
- 99.9% Access Control compat
- Safe trusted program logic
- Accepts 2 8k2 CAT3 safety
- Designed and built to last
- Effective security deterrent

Optional Extras

- Flashing Beacon
- Warning Signage
- Warning Siren
- LED Traffic lights
- Battery Back Up

Our designs use the latest technology to maintain the barriers smooth operation, via an integral frequency inverter driven motor and gearbox drive, which only requires a single phase supply, providing a smooth consistent operation.

It is controlled by a Feig Control Board, which can be programmed to suit any site configuration & form of access control requirements, therefore allowing speedy installation and no return visits to modify the programmes.

The power input to our automatic

barrier is 230v controlling a three phase motor, hence enables us to offer reliability and high torque.

With this control panel and gearbox design, we do not require any springs or counterweights to assist in the operation of the barriers.

Our aluminium externally placed

control cabinet has been designed to stand out from the rest. Its sleek looks are achieved by investing heavily into aluminium extrusions, which ensures product longevity, making it look as good as the day it was installed.

6000S-19 Automatic Barrier

01977 701566

info@gmcfabservices.co.uk



www.gmcfabservices.co.uk

BARRIER RANGE

6000SL-19 Automatic Barrier



Skirts | Hi-Bars | LEDs | Sensors | Plug & Play




Product Specifications

Gate Speed	3 to 7 Seconds (Speed WILL vary dependant upon barrier configuration)
Duty Cycle	100% Heavy Industrial Usage
Specification	CE Approved, TUV Approved
Power Requirements	Single Phase 240v 50Hz 10 Amps
Maximum Span Dimensions	6M plain pole only 4.5m Bottom Skirt
Drive Unit	3 Phase Motor & Wormed Gearbox
Material Construction	Aluminium & Polyester Powder Coated
Ambient Temperature	-20°C to +60°C (+65°C with vent kit (charges apply))
Unit Weight	Cabinet, contents and pole arm: 79Kg
Dimensions	Cabinet: 1110mm x 404mm x 416mm Pole: 94mm x 64mm OVAL
IP Rating	Ip56
Fixings	M12 anchor shield bolts included

Industry Standard

Our barriers have been classed as the best in the industry. It has been designed to last using the best materials and components that we can buy. As with all our products they are 100% Duty Cycle.



Absolute Control

The 6000 auto barriers feature a Feig control panel that is far more advanced for safety and motion than its rivals.



Red with white lid, and yellow with black lid, colours are standard with monitored safety edge



Custom cabinet colours are possible at extra cost


Aluminium Lid & Body Long Lasting Corrosion Free



Bottom Skirt Options

Beautifully Designed Strong Secure Cabinet

Bright LED Red/Green Lights (Additional Cost)



Integrated 8K2 Safety Edge as STD

6000S-19 Automatic Barrier

01977 701566

info@gmcfabservices.co.uk

www.gmcfabservices.co.uk