SWING GATE RANGE

9700A Swing Gate



Swing Gates | Compliant | Plug & Play



Features

- 100% duty cycle heavy industrial usage
- BS EN 12453 Peace of mind for safety
- Single Phase Supply
- Plug & Play installation
- Programmable control panel c/w fault diagnostic on screen display
- Highest specification of components are ONLY used
- Seamlessly forms part of the existing fence lines perimeter security
- Steel/Galvanised for long lasting and maintenance free performance
- MANY different infill's available to match clients exacting requirements
- Error log is stored in the control panel for fault diagnosis
- A VERY easy to use manual release mechanism which requires no tools in the event of power failure

9700A Added Benefits

- Ease of installation
- Low maintenance
- 99.9% Access Control compat
- Economical & Great Value
- Fire Alarm Input pre-configured
- Designed and built to last
- Easy to use for end users

Optional Extras

- Razor Wire Extensions
- Electric Fence
- Anti-Climb Spikes
- Traffic Lights
- Warning Siren
- Timber Infills
- Louvre Infills

The 9700 Swing Gates are a Plug & Play robust and reliable solution that will serve effortlessly for many years.

The 9700 Swing gates are and economical solution compared to the Bi-Folding Swing gates BUT share all the same security, safety and reliability.

The 9700 utilises a driven integrated frequency converter, single phase power, supplying a 3 phase motor, worm and wheel gearbox with a direct-drive shaft connected to the gate leaf, which ensures a smooth and positive movement. 9700 Swing gates are rated for 100% duty cycle i.e. continuous operation.

A wide range of alternative infills are available to suit customers requirements and to match adjoining fencing design. Also available are spiked tops, warning lights and sirens if required. The gates are supplied with an intelligent and compliant! control board which is mounted in the main pillar of the gate.

The 9700 Swing Gates comply

with BS/EN 12453 (ALL automated gates must comply with the current legislation).

We fit as standard a number of safety devices, including dual height photocells and category 3 safety edges. Our Swing Gates drastically reduce engineer installation time on site meaning this also is a better solution to automating existing gates financially for you and your customer.

9700A Swing Gate



SWING GATE RANGE

9700A Swing Gate



Swing Gates | Compliant | Plug & Play



Product Specifications

Gate Speed

Duty Cycle

Specification

Power Requirements

Colours

Maximum Span Dimensions

Maximum Height Dimensions

Material Construction

Unit Weight

8 to 12 Seconds (Speed WILL vary dependant upon gate size/Infill etc)

100% Heavy Industrial Usage Suitable for Indoor & Outdoor Usage

CE Approved, TUV Approved

Single Phase 240v 50Hz 10 Amps

All RAL Colours Available (Non Standard RAL's Optional Cost)

10m Clear Drive Through Opening

2.4 Metres (Max Width 10m)

3.0 Metres (Max Width 6m)

Steel Construction Main Tower all Components are Galvanised OR Zinc Plated Steel, the gate leaf will be constructed out

of specially designed aluminum extrusions. 595Kg Approx (dependant upon gates

size and infill type)

Industry Standard

Our gates have been classed as the best in the industry. It has been designed to last using the best materials and components that we can buy.

As with all our products they are 100% Duty Cycle.


Absolute Control

feature a Feig control panel that is far more advanced for safety and motion than its rivals.



The 9700 Swing Gates

*All gates are bespoke and manufactured to order.

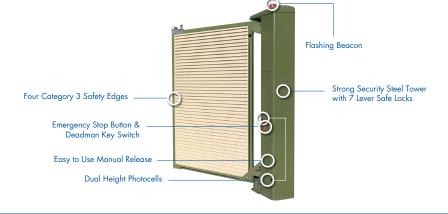

9700A Swing Gate



